Technical Data Sheet AMF T Grid Suspension Profiles



Product Information:

AMF T-Grid Suspension System is a light weight interlocking ceiling system with an exposed grid to support our range of AMF Ceiling Tiles. The combination of the pre-decorated white exposed grid and the white ceiling tile provides an aesthetic finish. AMF T24 T-Grid Suspension System is the ideal system to be used in conjunction with our AMF Ceiling Tile range, where quick and easy access to any part of the false ceiling is required.

Applicable sectors

Residential & Commercial
Healthcare & Educational
Auditorium & Cinemas
Airports,

Advantages

Lightweight, Easy to install, Attractive

 $A esthetic \ surface \ finish.$



Product	Specification	Length (mm)	Size	Pc/Carton
Main Tee	24 x 38 x 0.35mm	3600	Metric	25
	24 x 38 x 0.35mm	3660	Imperial	25
Cross Tee	24 x 32 x 0.35mm	1200	Metric	50
	24 x 32 x 0.35mm	1220	Imperial	50
Short Cross Tee	24 x 32 x 0.35mm	600	Metric	75
	24 x 32 x 0.35mm	660	Imperial	75
Wall Angle	20 x 20 / 25 x 25 - 0.45mm	3000	Metric	25
	20 x 20 / 25 x 25 - 0.45mm	3600	Imperial	25


Mechanical Properties:


- Galvanized Steel
- Product Specification & Grade: ASTM C635 & ASTM A653
- Treatment: Chromated (6) & Unoiled
- Yield Strength: 300 MPa 340 MPa
- Tensile Strength: 370MPa 400 MPa
- Elongation: 28% 30%
- Hardness (HRB): 60 65



AMF Main Tee

AMF Cross &
Short Cross Tee

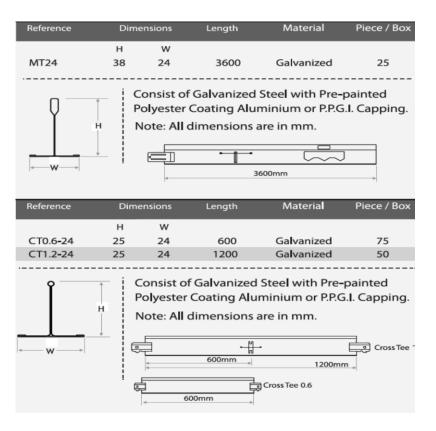

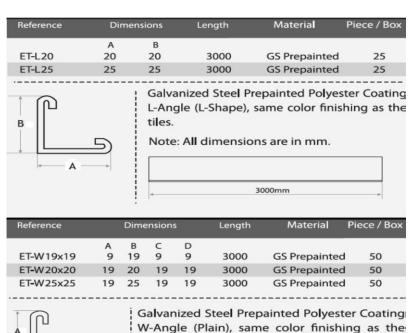

tiles. RAL 9010 / 9003

Note: All dimensions are in mm.

AMF Perimeter
Profiles