

### Product Information:

AMF U Track sections used as a Base & Head Profile to hold the Studs in to it. U Tracks provide a friction for the studs, which not only holds the studs in position until the lining board is fitted, but also helps in aligning the boards.

Application: Drywall Partition & Liner Systems

Standard Compliance: ASTM C645


Coating: Z 150, Z180 & Z275: ASTM A653

Steel Grade G300

Min. Yield Strength: 300 Mpa

Min. Tensile Strength: 340 Mpa

Material Galvanized Steel

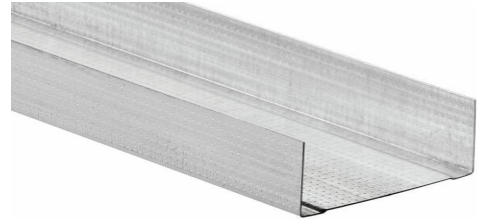

System Application	Component Description				
Partition System	Thickness (mm)	Width (mm)	Length (mm)	Flange (mm)	Packing
Cinema System Liner Systems					
<b>Specification</b>	0.45 - 0.9	40-150	3000	32	10
Coating :					
Az150 & Z275					
Zinc - Aluminium Alloy					
Steel Grad : G300					

### Product Information:

AMF Deep Track sections used as a Base & Head Profile to hold the Studs in to it. Deep Tracks provide a friction for the studs, which not only holds the studs in position during vertical Movements due to deflection, but also helps in aligning the boards.

Application: Drywall Partition & Liner Systems

Standard Compliance: ASTM C645


Coating: Z 150, Z180 & Z275: ASTM A653

Steel Grade G300

Min. Yield Strength: 300 Mpa

Min. Tensile Strength: 340 Mpa

Material Galvanized Steel

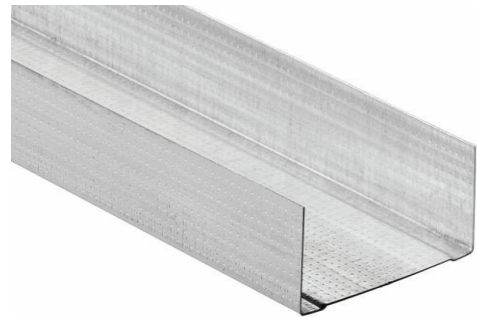

### System Application

Partition System

Cinema System

Liner Systems

### Specification

Coating :

Az150 & Z275

Zinc - Aluminium Alloy

Steel Grad : G300

### Component Description

	Thickness (mm)	Width (mm)	Length (mm)	Flange (mm)	Packing
	0.45 - 0.9	40-150	3000	50	10